

F

E

D

C

B

A

F

E

D

C

B

A

1

2

3

4

5

6

7

8

9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: PA9T UL94V-0

Housing: PA9T UL94V-0

端子(焊片): 磷青铜(黄铜)

Contact (Solder Tab): Phosphor bronze(Brass)

2-特性 (characteristics):

额定电压: 50V AC/DC

Voltage Rating: 50V AC/DC

额定电流: 1 AMP (AWG #28-32)

Raring Current: 1 AMP (AWG #28-32)

接触阻抗: ≤20mΩ MAX.

Contact Resistance: ≤20mΩ MAX.

绝缘阻抗: ≥100MΩMIN.

Insulating Resistance: ≥100MΩMIN.

耐电压: 500V AC/MINUTE

Withstanding Voltage: 500V AC/MINUTE




温度范围: -25度至+85度

Temperture Range: -25°Cto +85°C


ORDERING INFORMATION

W125-XX XX X XX X

NO.OF PINS Per Row 10-40P	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	PACKING A:PE Bag B:TUBE C:TRAY
SERLES NO 125:1.25mm	CONTACT PLATING FULL OF GOLD SEMI-GOLD A0=0.8u" B0=0.8U"	CONTACT SHAPE LT:STRAIGHT SMT WT:RIGHT ANGLE SME
... .. A9=30u" B9=30U"	 S1=ORDINARY TIN PLATED S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE	

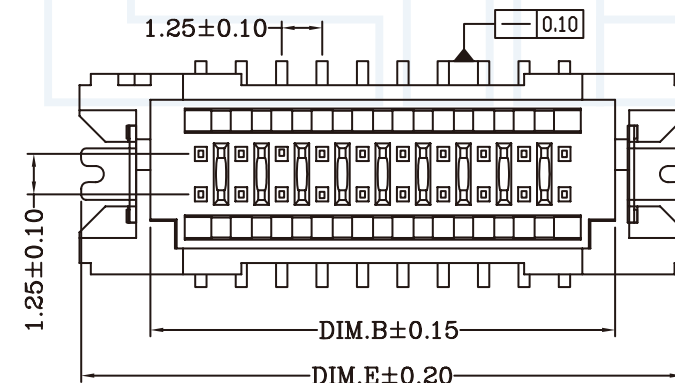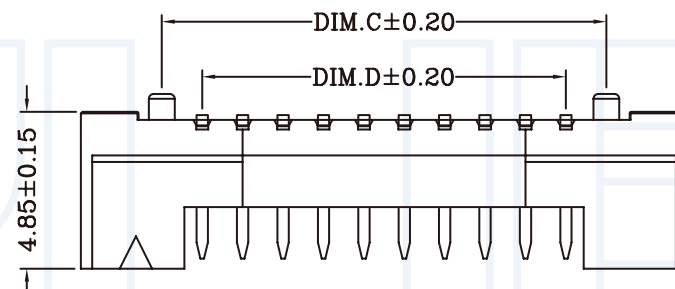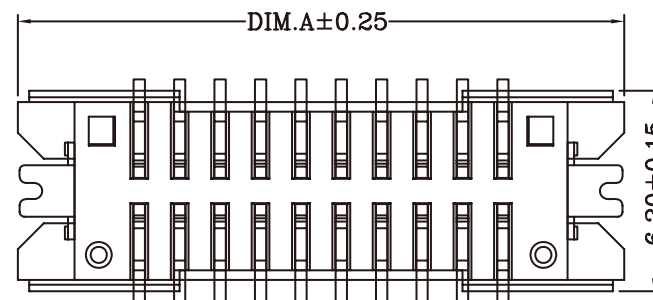

线数 Poles	编号	Poles	尺寸 Dimensions(mm)				
			DIM.A	DIM.B	DIM.C	DIM.D	DIM.E
10	1.25T-2-2X5A		12.50	8.10	7.50	5.00	12.05
20	1.25T-2-2X10A		18.75	14.35	13.75	11.25	18.30
30	1.25T-2-2X15A		25.00	20.60	20.00	17.50	24.55
36	1.25T-2-2X18A		28.75	24.35	23.75	21.25	28.30
40	1.25T-2-2X20A		31.25	26.85	26.25	23.75	30.80

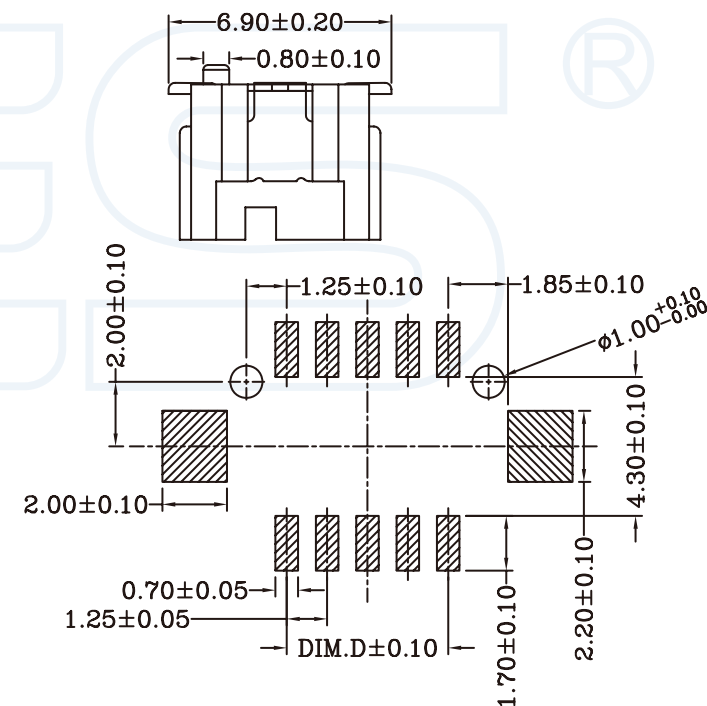

2

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON	REV	UNIT	SCALE	PAGE
	A	mm	1:1	1/1

TITLE

347-1.25mm 立贴 双排插针(DF13)

DATE

2018-02-18

PART NO:

W125-XXXXCLTB

DRAWING NO:

1

2

3

4

5

6

7

8

9